




**MANIFATTURA TUBI GOMMA S.p.A.**  
 Grisignano di Zocco, 36040 (VI) ITALY  
 T. +39 0444.614755 | info@mtgspa.com  
 www.mtgspa.com

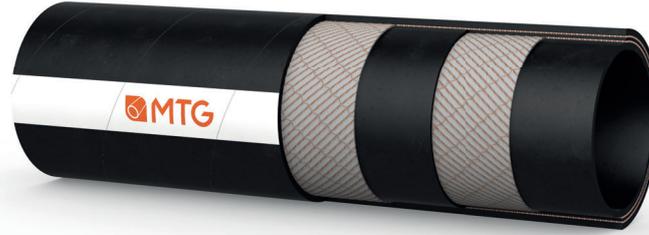

## APPLICATION

- Delivery hose suitable for hydrocarbons with an aromatic content up to 50%.
- Excellent for use on tank trucks, rail tanks and processing plants in the oil industry.
- Suitable for conveying petrol, diesel, biodiesel blends including B100 and fuels based on ethanol.

## CONSTRUCTION

### TUBE

- NBR1 rubber (code UNI E), black colour, antistatic ( $R < 10^6 \Omega$ ), smooth.

### REINFORCEMENT

- High strength plies of synthetic cord.
- Built-in copper wires upon request.

### COVER

- NBR rubber (code 5600 DIN), black colour, antistatic ( $R < 10^6 \Omega$ ), smooth, cloth finish.
- Resistant to abrasion, ozone, weather, fats and mineral oils.

## STANDARDS

- Execution in accordance with EN 12115:2011.

## TEMPERATURE RANGE

- In accordance with EN 12115:2011.

## SAFETY FACTOR

- $\geq 4$  times working pressure.

## ELECTRICAL PROPERTIES

- Electrical resistance through the hose wall:  $R < 10^9 \Omega$ .
- Identification symbol:
  - $\Omega/T$  for version without copper wires;
  - $M/T$  for version with copper wires.

## MARKING

- Embossed tape according to EN 12115:2011, lengthwise.

**MTG MANITANK NBR1 MADE IN ITALY**

## TECHNICAL SPECIFICATIONS

SIZE TOLERANCES: Inner Diameter: EN 12115 - Outer diameter: EN 12115 - Length: ISO 1307

Inner Diameter mm	Outer diameter mm	Wall thickness mm	Working pressure BAR	Burst pressure BAR	Vacuum BAR	Min. bending radius mm	Approx. weight kg/m	Max. length m
13	23	5.0	16	64	-0.5	90	0.45	40
19	31	6.0	16	64	-0.5	125	0.65	40
25	37	6.0	16	64	-0.4	150	0.75	40
32	44	6.0	16	64	-0.4	175	0.90	40
38	51	6.5	16	64	-0.4	225	1.10	40
50	66	8.0	16	64	-0.3	275	1.80	40
63.5	79.5	8.0	16	64	---	300*	2.20	40
75	91	8.0	16	64	---	350*	3.00	40
100	116	8.0	16	64	---	450*	3.90	40

(\* Bending radius to be reached at a pressure of  $\geq 1$  bar. Chemical resistance acc. to MTG Chemical Resistance Chart.  
 Above technical data refer to application at room temperature (+20°C). Other sizes and colours are available upon request. Please contact our Sales Department.